

Bay and Bow Window System

Design, Workmanship, and Performance

**FOAM-FILLED
MULLING
CONNECTORS**

Sag-Free Bracing System with
Maximum Thermal Protection

**1.25"
FURNITURE-GRADE
HARDWOOD VENEER**

Compare v. 3/4" Systems
(Shown with optional pre-stained surface)

**SOLID STEEL
THREADED
ROD**

Sag-Free Bracing System
with steel eyebolt




**SAG-FREE
CABLE-FREE**
Chained Bracing System

**800 POUND
Working Load Limit
per support!**

**FOAM-FILLED
WINDOW
FRAME, SASHES**
Superior Insulating Value
and Sound Resistance

**MULL COVER
PLATES**

No butt-joints to caulk
or leak

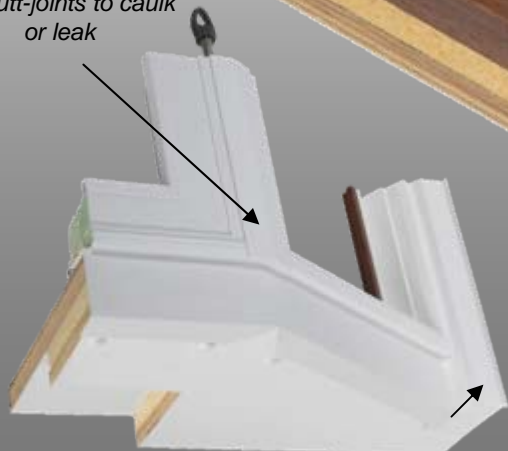

EDGE BANDING

Eye appeal and protected
exposed edges

OPTIONAL
"Entire Seat" style:



DEFAULT:
"Stop at the Jamb" style



**Super Seat™
DOW® FOAM
SANDWICH**

Full 3" Thick with R-9 performance for Maximum
Thermal Protection; fights Condensation

R-9

View of factory-capped underside; beautiful lines,
consistent water shed